



Mass-Storage

ICS332 - Fall 2017
Operating Systems


Henri Casanova (henric@hawaii.edu)



Magnetic Disks

- Magnetic disks (a.k.a. “hard drives”) are (still) the most common secondary storage devices today
- They are “messy”
 - Errors, bad blocks, missed seeks, moving parts
- And yet, the data they hold is critical
- The OS used to hide all the “messiness” from higher-level software
 - Programs shouldn’t have to know anything about the way the disk is built
- This has been done increasingly with help from the hardware
 - i.e., the disk controller
- What do hard drives look like?

Hard Drive Structure

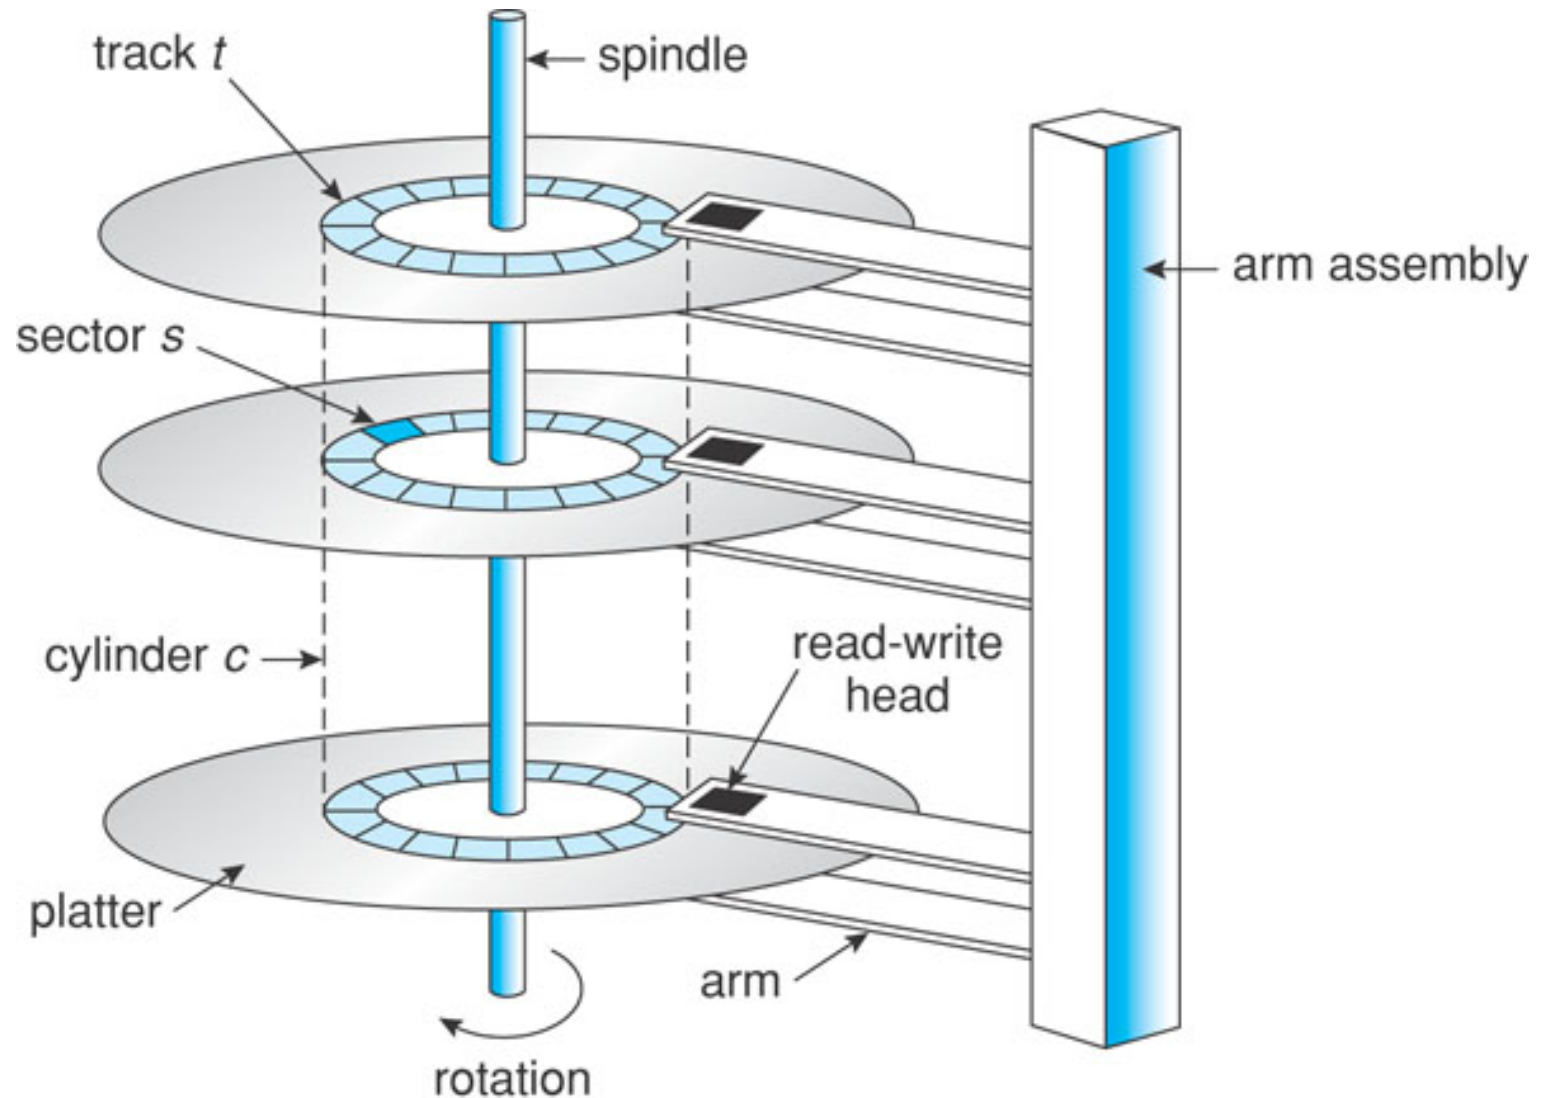

Hard Drive access Access

- A hard drive requires a lot of information for an access
 - Platter #, sector #, track #, etc.
- Hard drives today are more complicated than the simple picture
 - e.g., sectors of different sizes to deal with varying densities and radial speeds with respect to the distance to the spindle
- Nowadays, hard drives comply with standard interfaces
 - EIDE, ATA, SATA, USB, Fiber Channel, SCSI
- The hard drives, in these interfaces, is seen as an array of logical blocks (512 bytes)
- The device, in hardware, does the translation between the block # and the platter #, sector #, track #, etc.
- This is good:
 - The kernel code to access the disk is straightforward
 - The controller can do a lot of work, e.g., transparently hiding bad blocks
- The cost is that some cool optimizations that the kernel could perhaps do are not possible, since all its hidden from it

Hard Drive Performance

- We've said many times that hard drives are slow
- Data request performance depends on three steps
 - **Seek** - moving the disk arm to the correct cylinder
 - Depends on how fast disk arm can move (increasing very slowly over the years)
 - **Rotation** - waiting for the sector to rotate under the head
 - Depends on rotation rate of disk (increasing slowly over the years)
 - **Transfer** - transferring data from surface into disk controller electronics, sending it back to the host
 - Depends on density (increasing rapidly over the years)
- When accessing the hard drives, the OS and controller try to minimize the cost of all these steps

Disk Scheduling

- Just like for the CPU, one must schedule disk activities
- The OS receives I/O requests from processes, some for the disk
- These requests consist of
 - Input or output
 - A disk address
 - A memory address
 - The number of bytes (in fact sectors) to be transferred
- Given how slow the disk is and how fast processes are, it is common for the disk to be busy when a new request arrives
- The OS maintains a **queue of pending disk requests**
 - Processes are in the blocked state and placed in the device's queue maintained by the kernel
- After a request completes, a new request is chosen from the queue
- **Question:** which request should be chosen?

Seek Time

- Nowadays, the average seek time is in orders of milliseconds
 - Swinging the arm back and forth takes time
- This is an eternity from the CPU's perspective
 - 2 GHz CPU
 - 5ms seek time
 - 10 million cycles!




Credit: Alpha six

- A good goal is to minimize seek time
 - i.e., minimize arm motion
 - i.e., minimize the number of cylinders the head travels over

First Come First Serve (FCFS)

- FCFS: as usual, the simplest

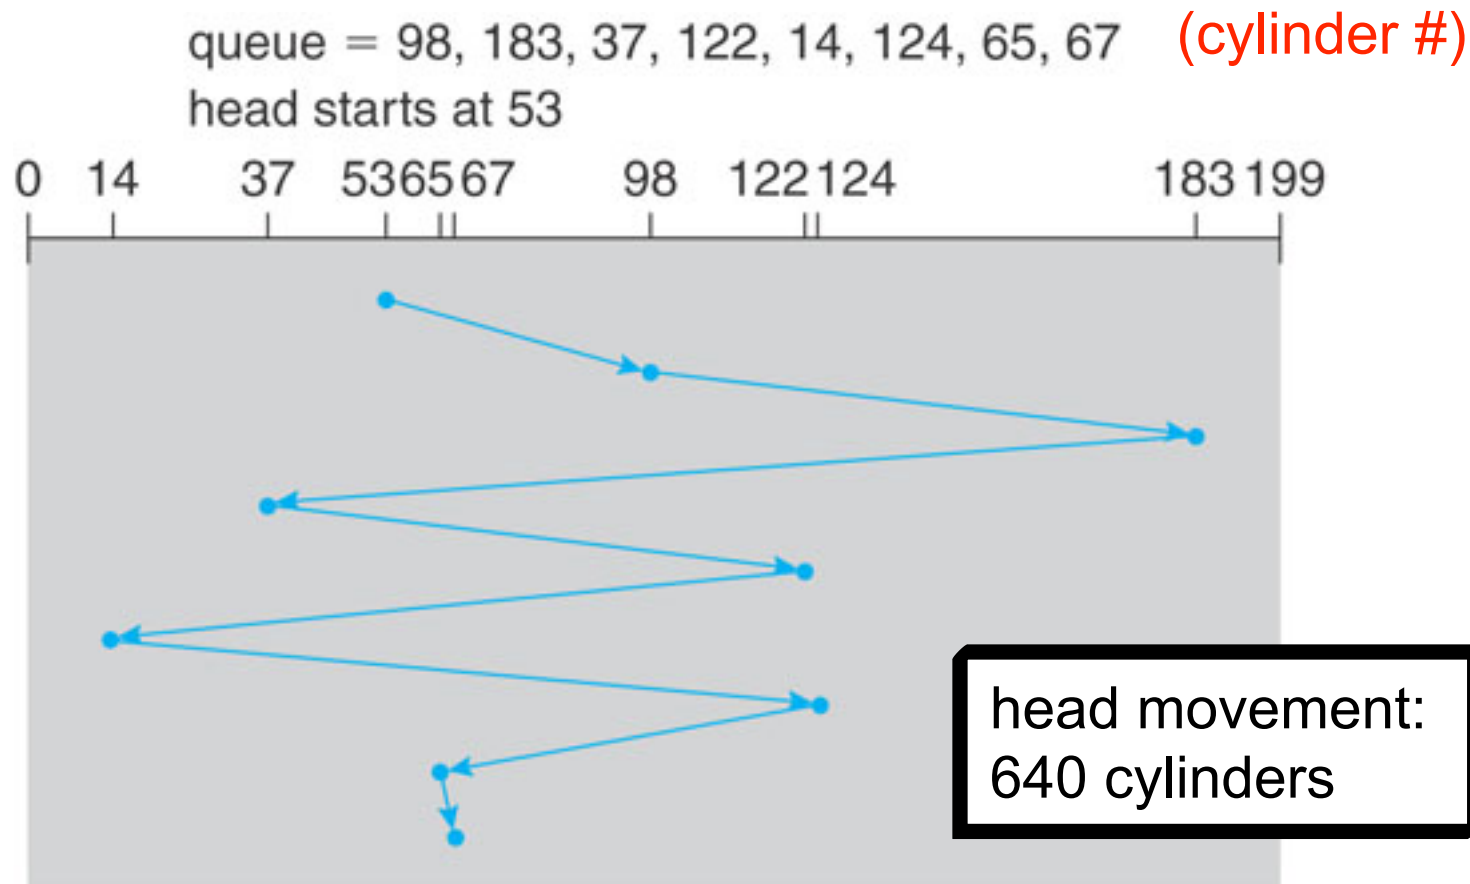


Shortest Seek Time First (SSTF)

- SSTF: Select the request that's the closest to the current head position

queue = 98, 183, 37, 122, 14, 124, 65, 67 (cylinder #)

head starts at 53

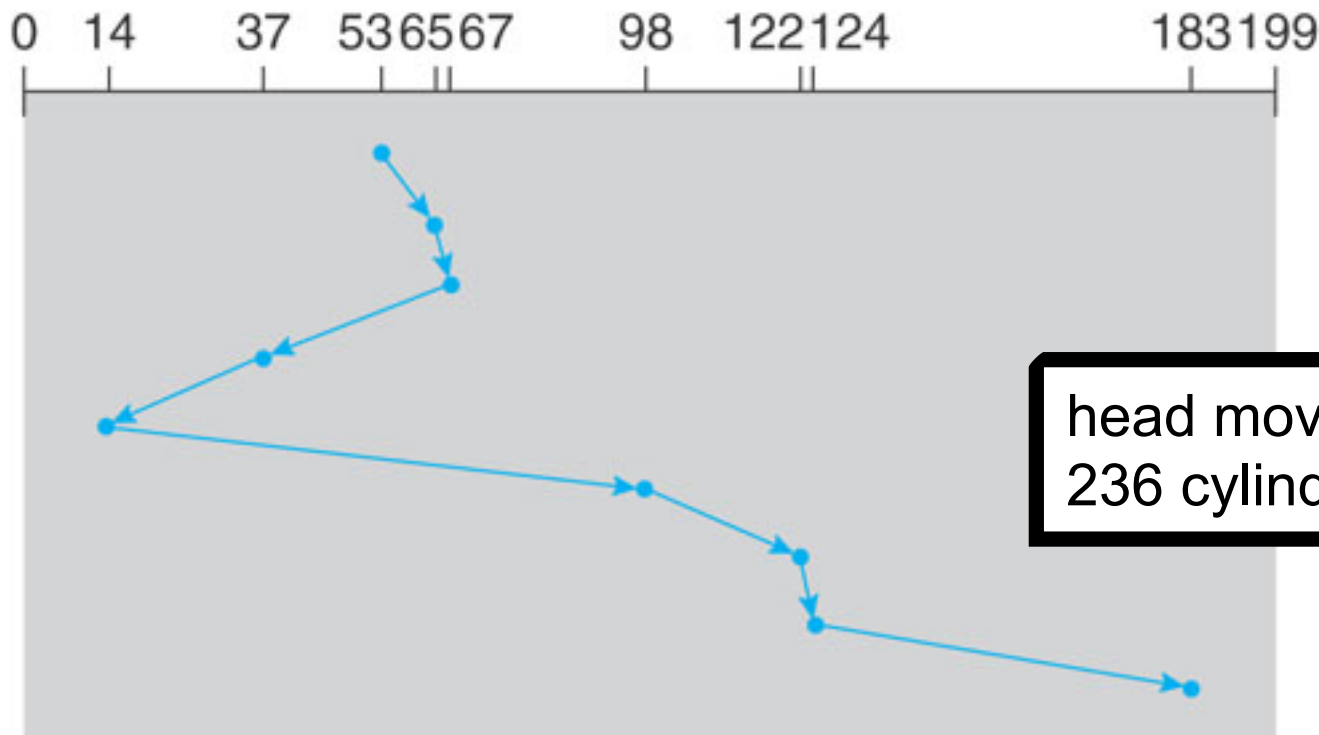

head movement:
236 cylinders

SSTF


- SSTF is basically SJF (Shortest job First), but for the disk
- Like SJF, it may cause starvation
 - If the head is at 80, and if there is a constant stream of requests for cylinders in $[50, 100]$, then a request for cylinder 200 will never be served
- Also, it is not optimal in terms of number of cylinders
 - On our example, it is possible to achieve as low as 208 head movements

SCAN Algorithm

- The head goes all the way up and down, just like an **elevator**
 - It serves requests as it reaches each cylinder

queue = 98, 183, 37, 122, 14, 124, 65, 67 (cylinder #)

head starts at 53

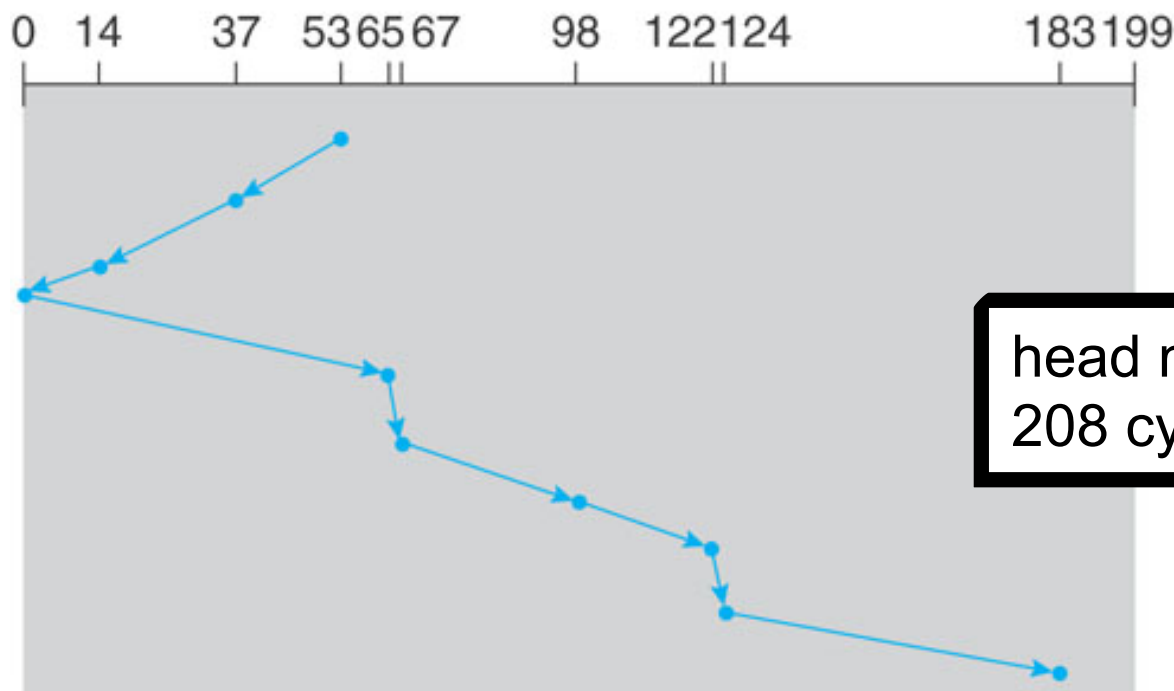


head movement:
208 cylinders

SCAN Algorithm

- There can be no starvation with SCAN
- Moving the head from one cylinder to the next takes little time and is better than swinging back and forth
- One small problem: After reaching one end, assuming requests are uniformly distributed, when the head reverses direction it will find very few requests initially
 - Because it just served them on the way up
 - Not quite like an elevator in this respect
- This leads to non-uniform wait times
 - Requests that just missed the head close to one end have to wait a long time
- Solution: C-SCAN
 - When the head reaches one end, it “jumps” to the other end instead of reversing direction
 - Just as if the cylinder were organized in a circular list

C-SCAN

queue = 98, 183, 37, 122, 14, 124, 65, 67 (cylinder #)
head starts at 53

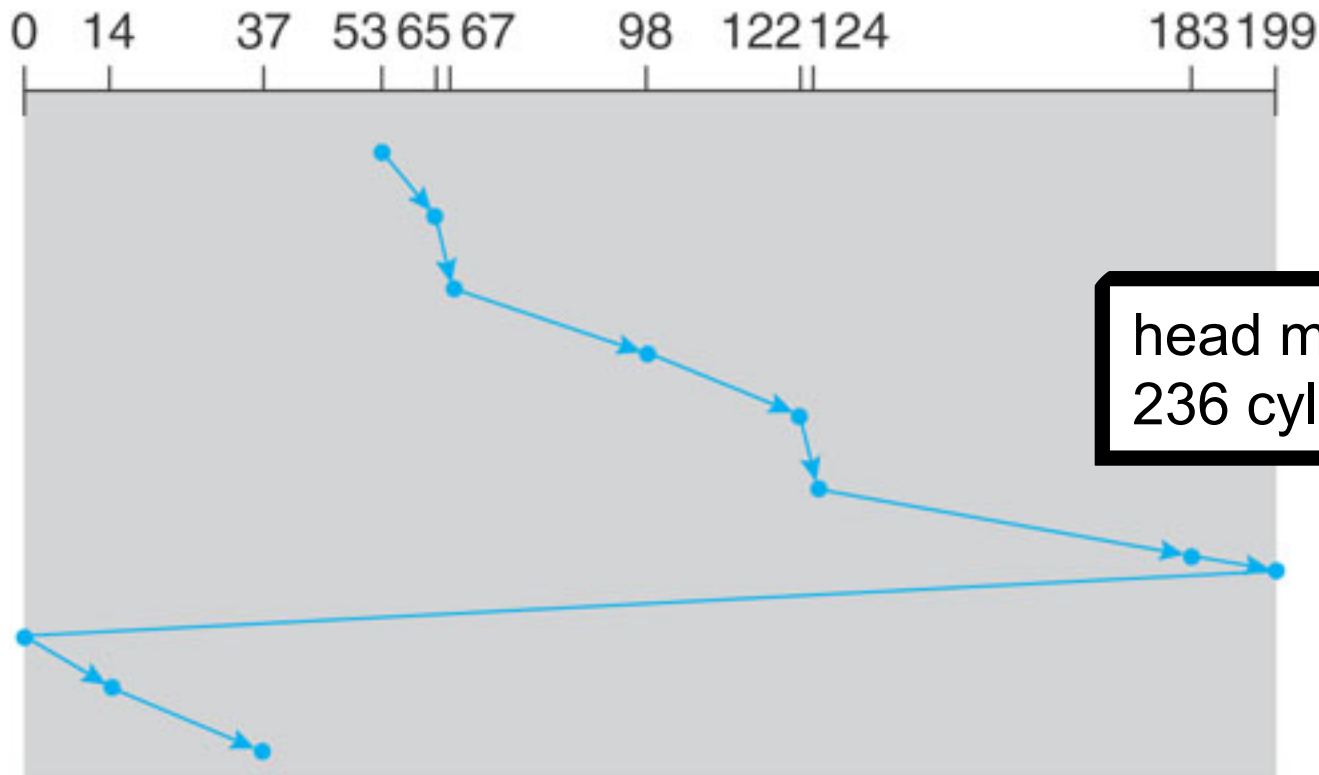

Hard Drive Scheduling Recap

- As usual, there is no “best” algorithm
 - Highly depends on the workload
- Do we care?
 - For home PCs, there aren't that many I/O requests, so probably not
 - For servers, disk scheduling is crucial
 - And SCAN-like algorithms are “it”
- Modern drives implement the disk scheduling themselves
 - SCAN, C-SCAN
 - Also because the OS can't do anything about rotation latency, while the disk controller can
 - It's not all about minimizing seek time
- However, the OS must still be involved
 - e.g., not all requests are created equal

Hard Drives Reliability

- Hard drives are **not reliable**
 - MTTF (Mean Time To Failure) is not infinite
 - And failures can be catastrophic
- Interesting Google article: labs.google.com/papers/disk_failures.pdf
- They looked at over 100,000 disks in 2007 and looked at failure statistics
- Let's look at one of their graphs

Disk Reliability

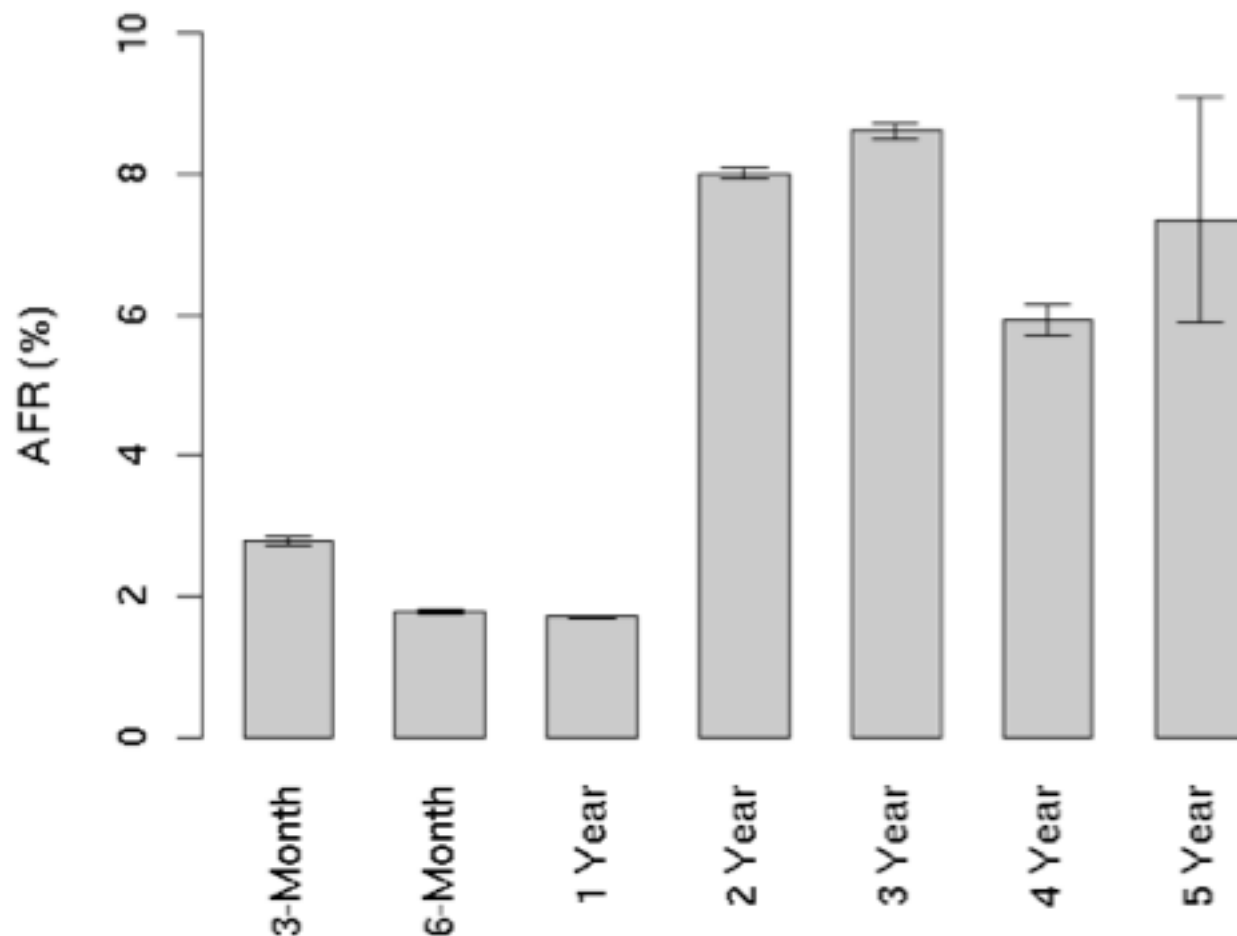


Figure 2: Annualized failure rates broken down by age groups


Hard Drives are Cheap



<https://www.backblaze.com/blog/hard-drive-cost-per-gigabyte/>

RAID

- Disks are unreliable, slow, and cheap
- Simple idea: let's use redundancy
 - Increases reliability
 - If one fails, you have another one (increased perceived MTTF)
 - Increases speed
 - Aggregate disk bandwidth if data is split across disks
- Redundant Array of Independent Disks
 - The OS can implement it with multiple bus-attached disks
 - An intelligent RAID controller in hardware
 - A "RAID array" as a stand-alone box

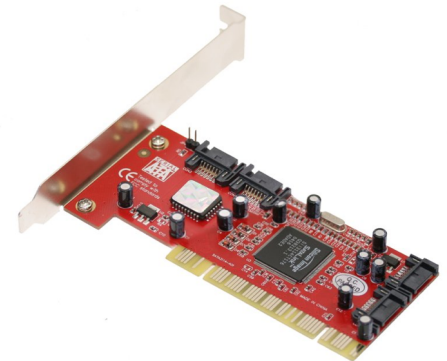



RAID Techniques

■ Data Mirroring

- Keep the same data on multiple disks
 - Every write is to each mirror, which takes time

■ Data Striping

- Keep data split across multiple disks to allow parallel reads
 - e.g., read bits of a byte from 8 disks

■ Parity Bits

- Keep information from which to reconstruct lost bits due to a drive failing

- These techniques are combined at will



RAID Levels


- Combinations of the techniques are called “levels”
 - More of a marketing tool, really
- You should know about common RAID levels
 - The book talks about all of them
 - but for level 2, which is not used



RAID 0

- Data is striped across multiple disks
 - Using a fixed strip size
- Gives the illusion of a larger disk with high bandwidth when reading/writing a file
 - Accessing a single strip is not any faster
- Improves performance, but not reliability
- Useful for high-performance applications

RAID 0 Example

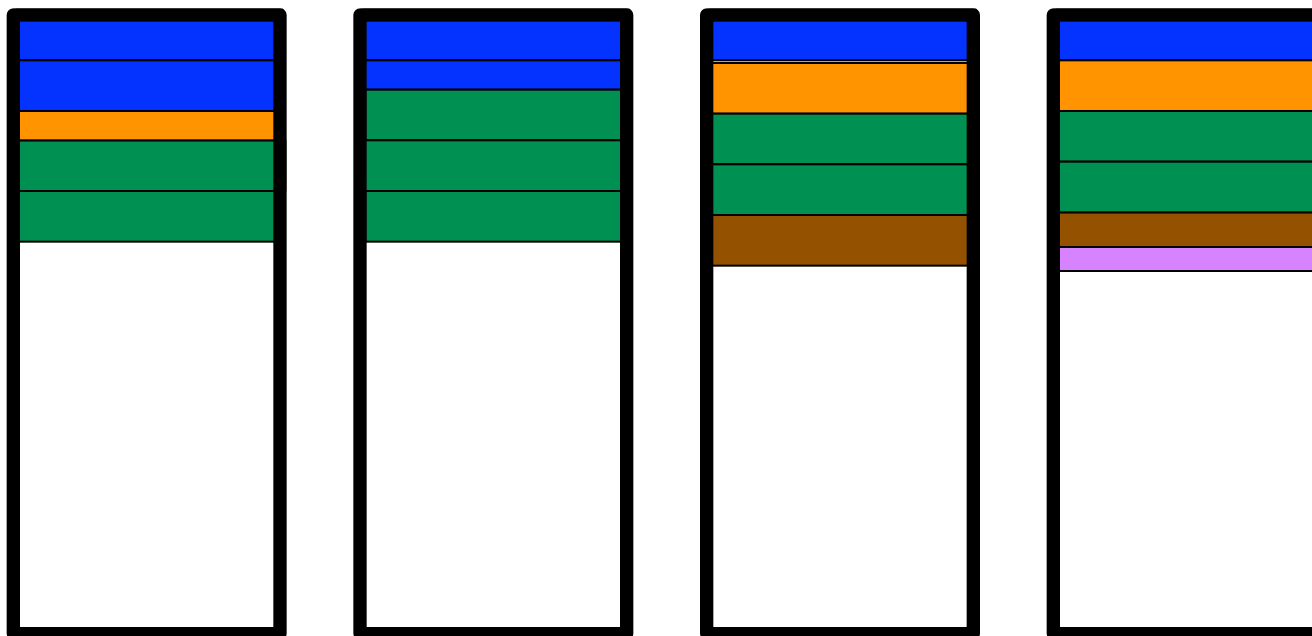


- Fixed strip size
- 5 files of various sizes
- 4 disks



RAID 1

- **Mirroring** (also called shadowing)
- Write every written byte to 2 disks
 - Uses twice as many disks as RAID 0
- Reliability is ensured unless you have (extremely unlikely) simultaneous failures
- Performance can be boosted by reading from the disk with the fastest seek time
 - The one with the arm the closest to the target cylinder

RAID 1 Example

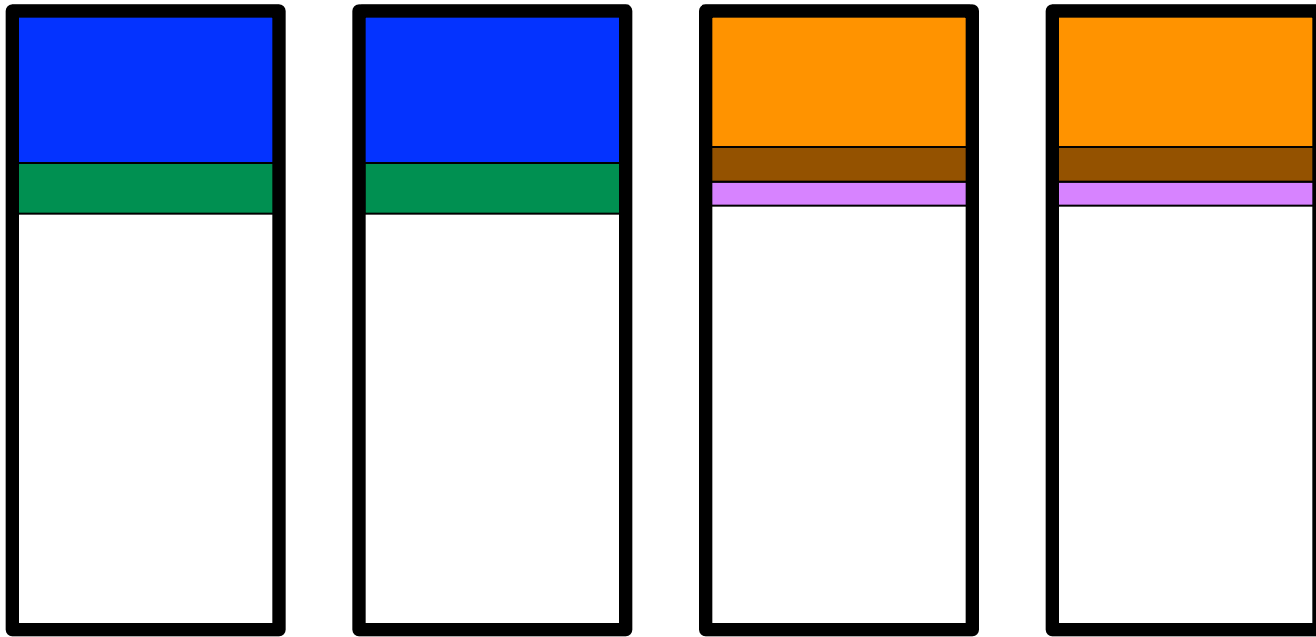

- 5 files of various sizes
- 4 disks

RAID 3

■ Bit-interleaved parity

- Each write goes to all disks, with each disk storing one bit
- A parity bit is computed, stored, and used for data recovery

■ Example with 4 disks and 1 parity disk

- Say you store bits 0 1 1 0 on the 4 disks
- The parity bit stores the XOR of those bits: $((0 \text{ xor } 1) \text{ xor } 1) \text{ xor } 0 = 0$
- Say you lose one bit: 0 ? 1 0
- You can XOR the remaining bits with the parity bit to recover the lost bit: $((0 \text{ xor } 0) \text{ xor } 1) \text{ xor } 0 = 1$
- Say you lose a different bit: 0 1 1 ?
- The XOR still works: $((0 \text{ xor } 1) \text{ xor } 1) \text{ xor } 0 = 0$


■ Bit-level striping increases performance

■ XOR overhead for each write (done in hardware)

■ Time to recovery is long (a bunch of XOR's)

RAID 4 and 5

- RAID 4: Basically like RAID 3, but interleaving it with strips
 - A (small) read involves only one disk
- RAID 5: Like RAID 4, but parity is spread all over the disks as opposed to having just one parity disk, as shown below

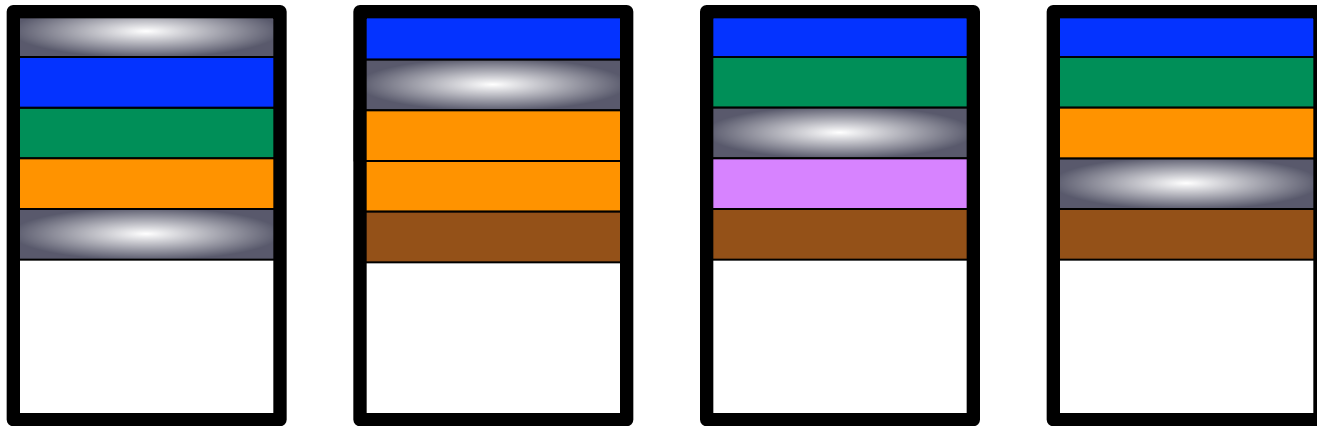

- RAID 6: like RAID 5, but allows simultaneous failures (rarely used)



OS Disk Management

- The OS is responsible for
 - Formatting the disk
 - Booting from disk
 - Bad-block recovery



Physical Disk Formatting

- Divides the disk into sectors
- Fills the disk with a special data structure for each sector
 - A header, a data area (512 bytes), and a trailer
- In the header and trailer is the sector number, and extra bits for error-correcting code (ECC)
 - The ECC data is updated by the disk controller on each write and checked on each read
 - If only a few bits of data have been corrupted, the controller can use the ECC to fix those bits
 - Otherwise the sector is now known as “bad”, which is reported to the OS
- Typically all done at the factory before shipping



Logical Formatting

- The OS first partitions the disk into one or more groups of cylinders: **the partitions**
- The OS then treats each partition as a separate disk
- Then, **file system** information is written to the partitions
 - See the File System lecture

Boot Blocks

- Remember the boot process from a previous lecture
 - There is a small ROM-stored bootstrap program
 - This program reads and loads a full bootstrap stored on disk
- The full bootstrap is stored in the boot blocks at a fixed location on a boot disk/partition
 - The so-called **master boot record**
- This program then loads the OS



Bad Blocks


- Sometimes, data on the disk is corrupted and the ECC can't fix it
- Errors occur due to
 - Damage to the platter's surface
 - Defect in the magnetic medium due to wear
 - Temporary mechanical error (e.g., head touching the platter)
 - Temporary thermal fluctuation
- The OS gets a notification

Bad Blocks

- Upon reboot, the disk controller can be told to replace a bad block by a spare: **sector sparing**
 - Each time the OS asks for the bad block, it is given the spare instead
 - The controller maintains an entire block map
- Problem: the OS's view of disk locality may be very different from the physical locality
- Solution #1: Spares in each cylinders and a spare cylinder
 - Always try to find spares "close" to the bad block
- Solution #2: Shuffle sectors to bring the spare next to the bad block
 - Called **sector splitting**

Solid-State Drives (SSDs)

- Purely based on solid-state memory
 - Flash-based: persistent but slow - The common case
 - DRAM-based: volatile but fast

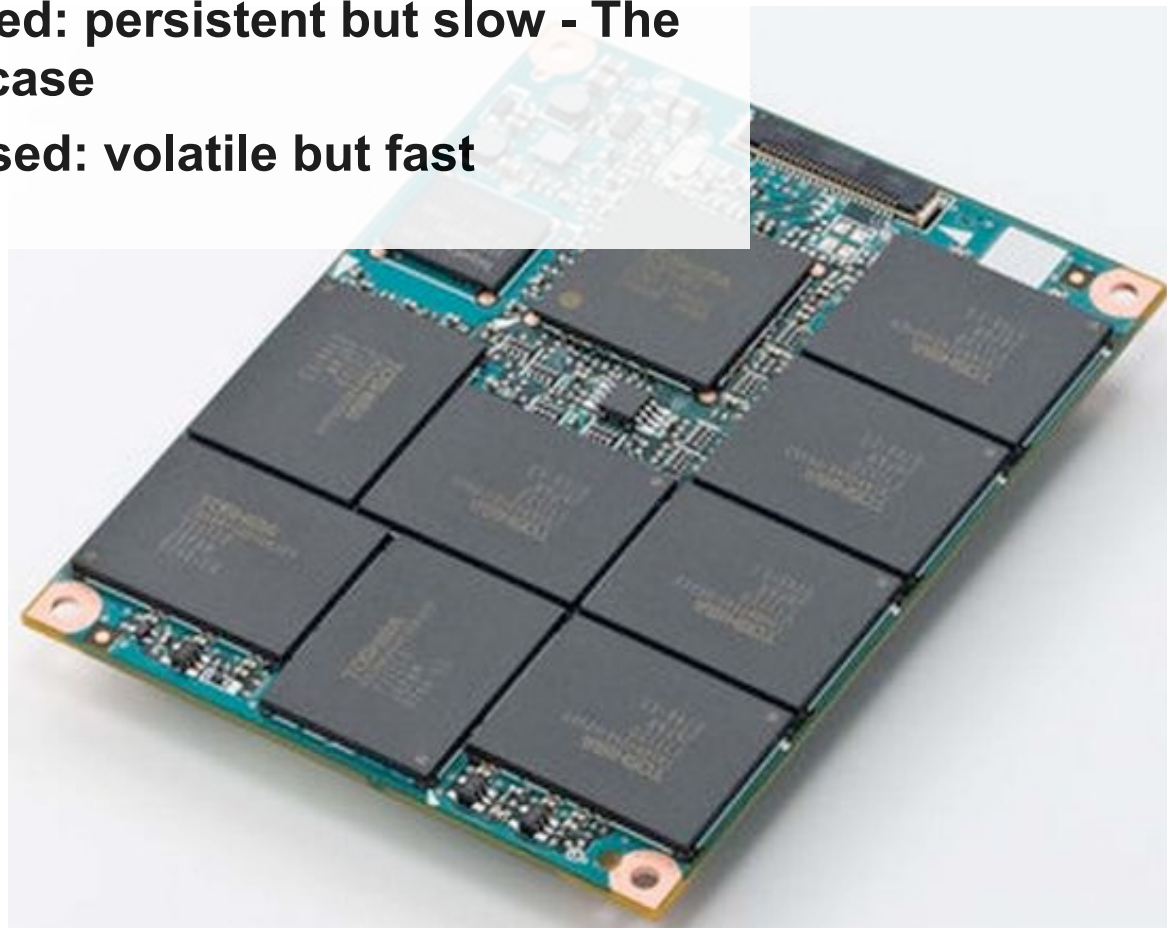


SSDs

- No moving parts!
- Flash SSDs competitive vs. hard drives
 - faster startups and reads
 - silent, low-heat, low-power
 - more reliable
 - less heavy
 - getting larger and cheaper, close to HDD
 - lower lifetime due to write wear off
 - Used to be a big deal, but now ok especially for personal computers
 - slower writes (????)
- SSDs are becoming more and more mainstream
- The death of HDD is not for tomorrow, but looks much closer than 5 years ago...


SSD Structure

- The flash cell

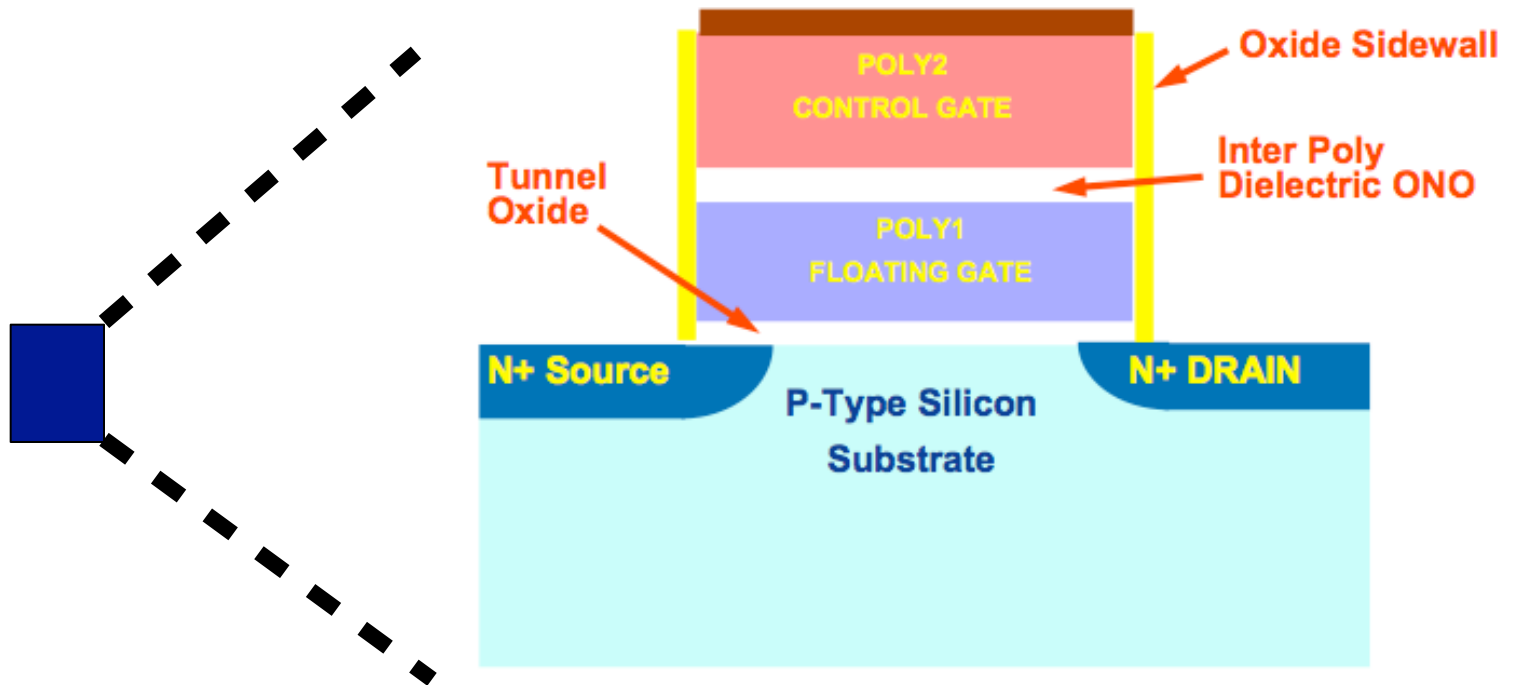


SSD Structure

- The **page** (4KB)

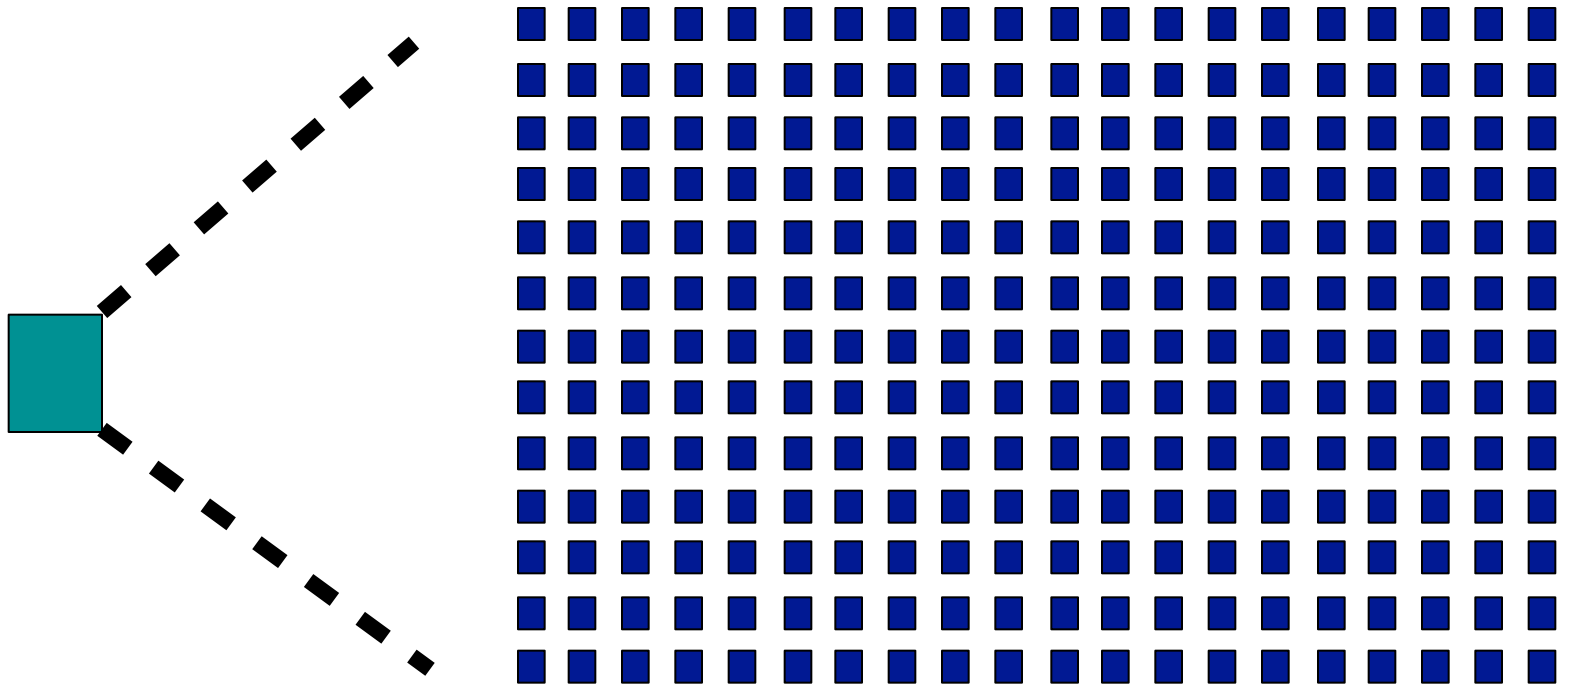

SSD Structure

- The **block**: 128 pages (512KB)

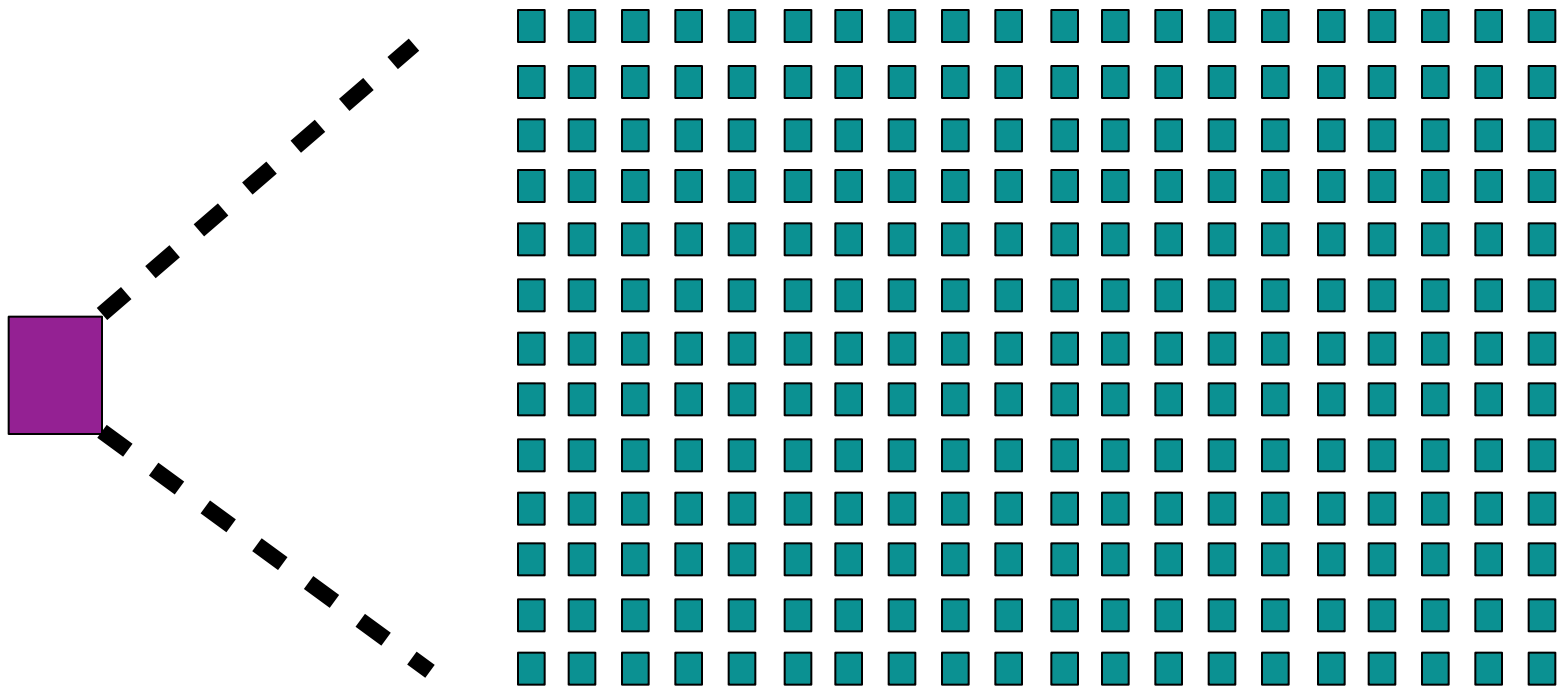


Why Slow Writes?


- SSD writes are considered slow because of **write amplification**: as time goes on, a write x bytes of data in fact entails writing $y > x$ bytes of data!!
- Reason:
 - The smallest unit that can be read: a 4KB page
 - The smallest unit that can be erased: a 512KB block
- Let's look at this on an example

Write Amplification

- Let's say we have a 6-page block

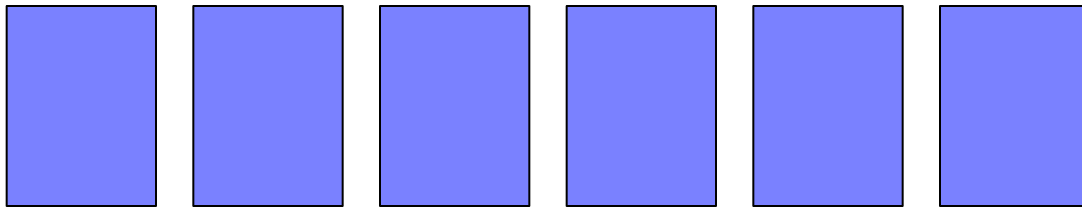


- Let's write a 4KB file

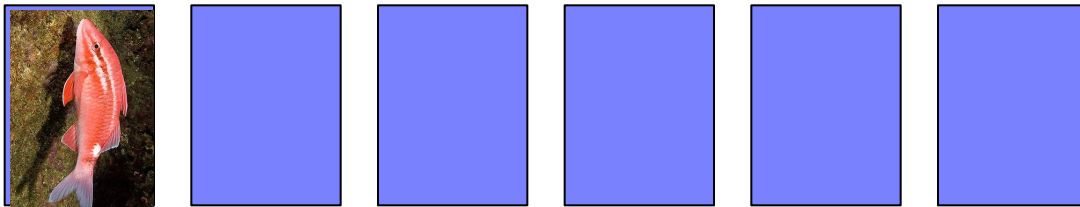


Write Amplification

- Let's write a 8KB file

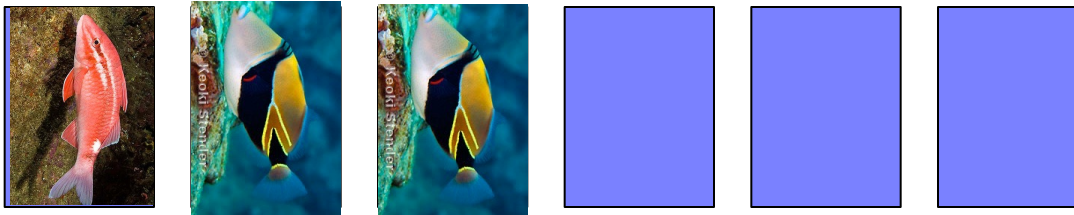


- Let's “erase” the first file


- We can't erase the file without erasing the block, so we just mark it as invalid

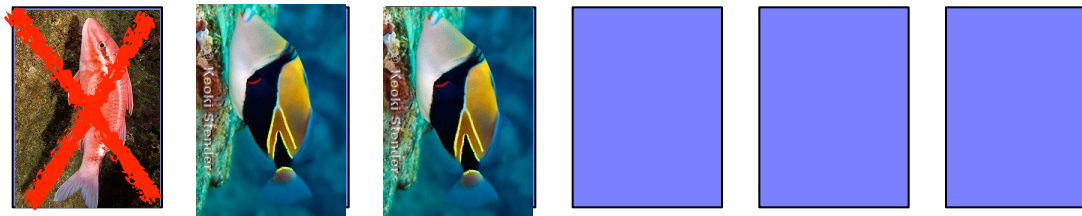

Write Amplification




- Let's write a 16KB file



- We have to

- load the whole block into RAM (or controller cache)
- Modify the in-memory block
- Write back the **whole** block



Write Amplification


- To write $4\text{KB} + 8\text{KB} + 16\text{KB} = 28\text{KB}$ of application data, we had to write $4\text{KB} + 8\text{KB} + 24\text{KB} = 36\text{KB}$ of data to the SSD
- As the drive fills up and files get written/modified/deleted, writes end up amplified
- The controller keeps writing on the SSD until full, before it attempts any rewrite
- In the end, performance is still good relative to that of an HDD
- The OS can, in the background, clean up block with invalid pages so that they're easily writable when needed



SSDs vs. HDDs

- SSDs have many advantages of HDDs
 - Random read latency much smaller
 - SSDs are great at parallel read/write
 - SSDs are great at small writes
 - SSDs are great for random access in general
 - Which is typically the bane of HDDs
- Note that not all SSDs are made equal
 - Constant innovations/improvements

SSDs are getting cheaper

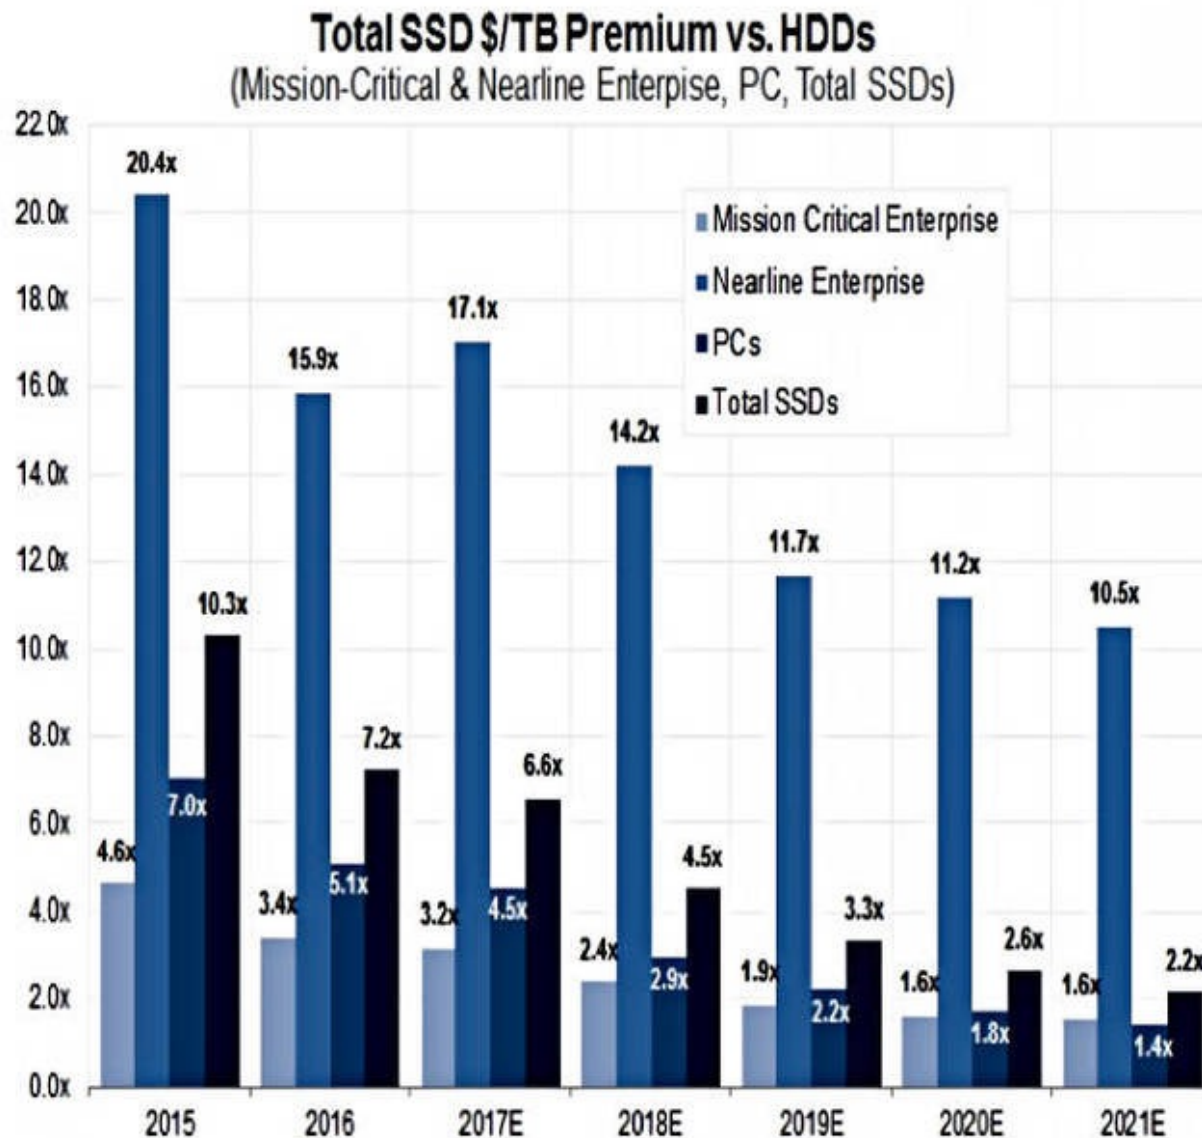

Source: IDC, Stifel



Conclusion

- HDDs are slow, large, unreliable, and cheap
- Disk scheduling by the OS/controller tries to help with performance
 - i.e., reduce seek time
- Redundancy is a way to cope with slow and unreliable HDDS
- SSDs provide a radically novel approach that may very well replace HDDs in the future
 - The two are likely to coexist for years to come
- The OS is involved in disk management functions, but with a lot of help from the drive controllers